

Terminal Connectors

FU Cable to Pad

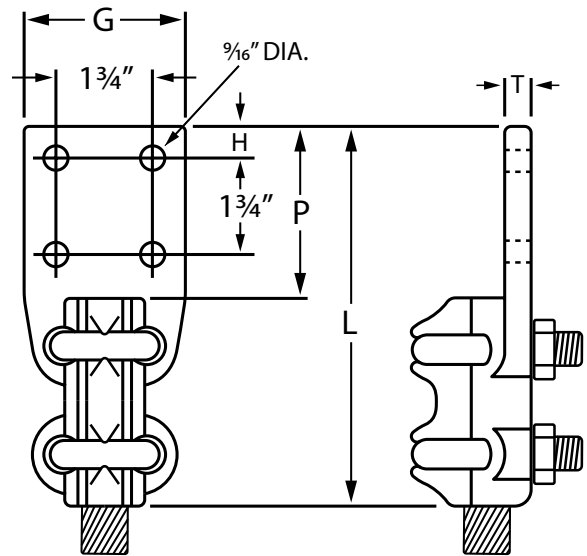
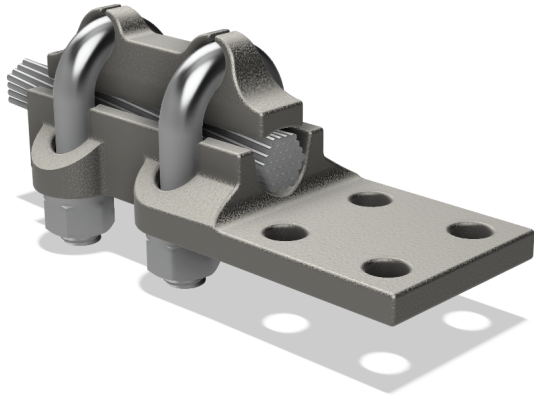


Fig. 2




Fig. 1




Fig. 3




Fig. 4

The Type "FU" high compression terminal lug provides a means of connecting stranded cable to the terminal pad of a switch or other similar equipment. Designed to carry full rated current of the maximum cable in the range, the "FU" lug assures a positive pressure between all strands, a high conductivity joint, and high pull-out strength.

CABLE RANGE A.W.G. OR M.C.M.		RATED SWITCH AMP CAPACITY	CATALOG NUMBER	FIGURE NUMBER	DIMENSIONS IN INCHES					U-BOLT DIA CABLE END
ALUMINUM	A.C.S.R.				G	H	L	P	T	
6 to 2/0	6 to 1/0	400 & 600	FU-101-AL	1	1 1/2	5/8	5 3/4	3 1/4	3/8	1/2
1/0 to 300	1/0 to 266.8	400 & 600	FU-121-AL	1	1 1/2	5/8	6 3/4	3 1/4	3/8	1/2
1/0 to 300	1/0 to 266.8	1200	FU-122-AL	2	3	5/8	6 3/4	3 1/4	3/8	1/2
1/0 to 300	1/0 to 266.8	2000	FU-123-AL	2	4	1 1/8	7 3/4	4 1/4	3/8	1/2
300 to 500	266.8 to 397.5	400 & 600	FU-131-AL	1	1 1/2	5/8	7	3 1/4	7/16	1/2
300 to 500	266.8 to 397.5	1200	FU-132-AL	2	3	5/8	7	3 1/4	7/16	1/2
300 to 500	266.8 to 397.5	2000	FU-133-AL	2	4	1 1/8	8	4 1/4	7/16	1/2
500 to 800	397.5 to 666.6	400 & 600	FU-140-AL	1	1 1/2	5/8	8	3 1/4	1/2	5/8
500 to 800	397.5 to 666.6	1200	FU-141-AL	2	3	5/8	8	3 1/4	1/2	5/8
500 to 800	397.5 to 666.6	2000	FU-142-AL	2	4	1 1/8	9	4 1/4	1/2	5/8
750 to 1000	636 to 900	400 & 600	FU-150-AL	3	1 1/2	5/8	8 5/8	3 1/4	9/16	5/8
750 to 1000	636 to 900	1200	FU-151-AL	4	3	5/8	8 5/8	3 1/4	9/16	5/8
750 to 1000	636 to 900	2000	FU-152-AL	4	4	1 1/8	9 5/8	4 1/4	9/16	5/8
1000 to 1500	900 to 1272	400 & 600	FU-159-AL	3	1 1/2	5/8	9	3 1/4	5/8	5/8
1000 to 1500	900 to 1272	1200	FU-160-AL	4	3	5/8	9	3 1/4	5/8	5/8
1000 to 1500	900 to 1272	2000	FU-161-AL	4	4	1 1/8	10	4 1/4	5/8	5/8
1510.5 to 2000	1351.5 to 1780	1200	FU-170-AL	4	3	5/8	9 1/4	3 1/4	11/16	5/8
1510.5 to 2000	1351.5 to 1780	2000	FU-171-AL	4	4	1 1/8	10 1/4	4 1/4	3/4	5/8

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**

