

Terminal Connectors

FU Cable to Pad

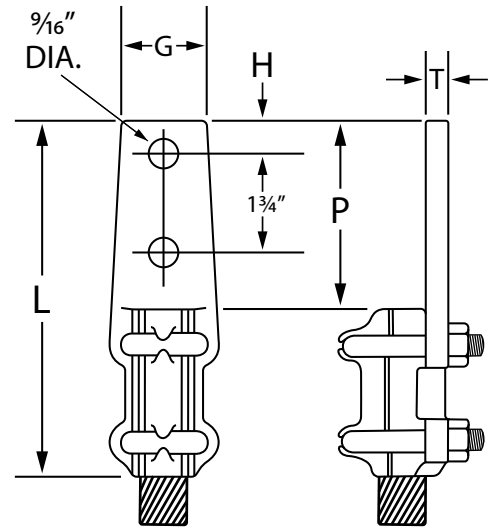
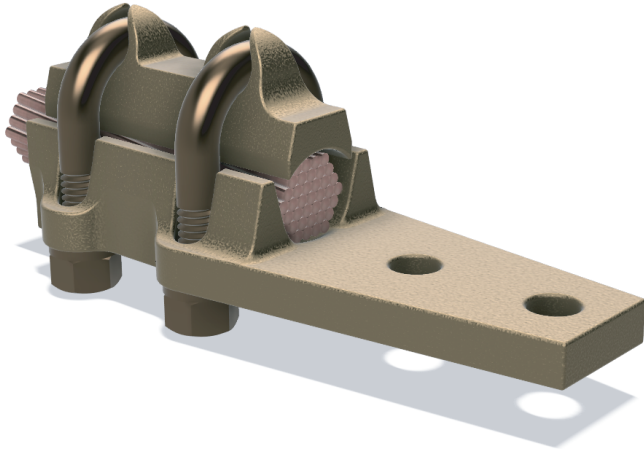


Fig. 2

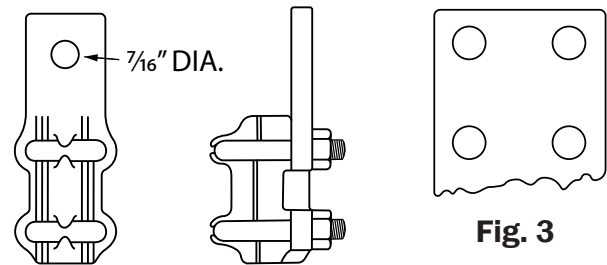


Fig. 1

Fig. 3

The type "FU" high compression terminal lug has a longitudinal wave cast in both the body and adjustable saddle, or yoke, providing a definite wrapping action which slightly deforms the cable as the bolts are tightened. This provides positive pressure between all strands and assures a high conductivity joint with high pull out strength.

CABLE RANGE A.W.G. OR M.C.M.		RATED SWITCH AMP CAPACITY	CATALOG NUMBER	FIGURE NUMBER	DIMENSIONS IN INCHES					U-BOLT DIA.
MIN.	MAX.				G	H	L	P	T	
6	2/0	200	FU-100	1	1 1/2	3/4	3 5/8	15/8	1/4	3/8
6	2/0	400 & 600	FU-101	2	1 1/2	5/8	5 1/4	3 1/4	1/4	3/8
1	4/0	200	FU-110	1	1 1/2	3/4	4	15/8	5/16	3/8
1	4/0	400 & 600	FU-111	2	1 1/2	5/8	5 1/2	3 1/8	5/16	3/8
1/0	300	200	FU-120	1	1 1/2	3/4	4 3/4	2	11/32	3/8
1/0	300	400 & 600	FU-121	2	1 1/2	5/8	5 7/8	3 1/8	11/32	3/8
1/0	300	1200	FU-122	3	3	5/8	6 1/16	3 5/16	11/32	3/8
1/0	300	2000	FU-123	3	4	1 1/8	7	4 1/4	11/32	3/8
300	500	400 & 600	FU-131	2	1 1/2	5/8	6 3/8	3 3/8	3/8	3/8
300	500	1200	FU-132	3	3	5/8	6 5/16	3 5/16	3/8	3/8
300	500	2000	FU-133	3	4	1 1/8	7 1/4	4 1/4	1/4	3/8
500	800	400 & 600	FU-140	2	1 1/2	5/8	7 1/2	3 3/4	3/8	1/2
500	800	1200	FU-141	3	3	5/8	7	3 1/4	3/8	1/2
500	800	2000	FU-142	3	4	1 1/8	8	4 1/4	3/8	1/2
750	1000	400 & 600	FU-150	2	1 1/2	5/8	7 3/4	3 3/4	3/8	1/2
750	1000	1200	FU-151	3	3	5/8	7 5/16	3 5/16	3/8	1/2
750	1000	2000	FU-152	3	4	1 1/8	8 1/4	4 1/4	7/16	1/2
1000	1500	400 & 600	FU-159	2	1 1/2	5/8	7 3/4	3 1/4	5/8	1/2
1000	1500	1200	FU-160	3	3	5/8	8	3 1/2	1/2	1/2
1000	1500	2000	FU-161	3	4	1 1/8	8 3/4	4 1/4	3/8	1/2
1500	2000	400 & 600	FU-169	2	1 1/2	5/8	7 3/4	3 1/4	1/2	1/2
1500	2000	1200	FU-170	3	3	5/8	7 3/4	3 1/4	1/2	1/2
1500	2000	2000	FU-171	3	4	1 1/8	8 3/4	4 1/4	9/16	1/2

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**

