
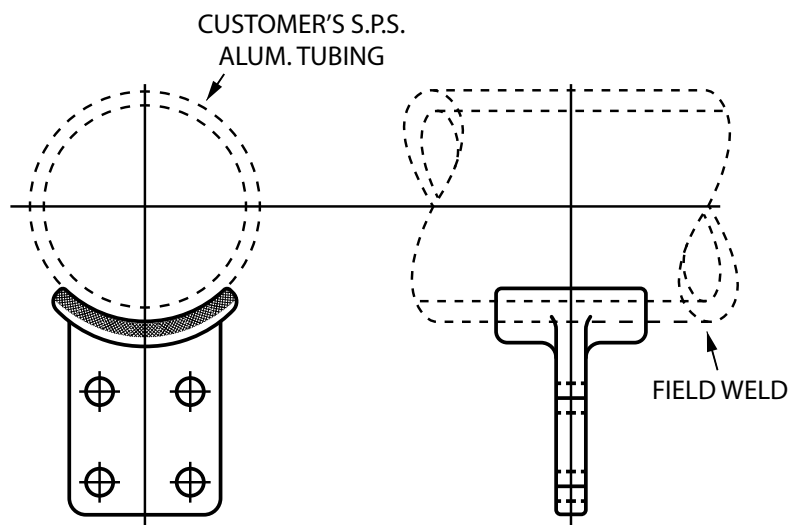


T-Connectors

WBL For S.P.S. Sch. 40 or 80

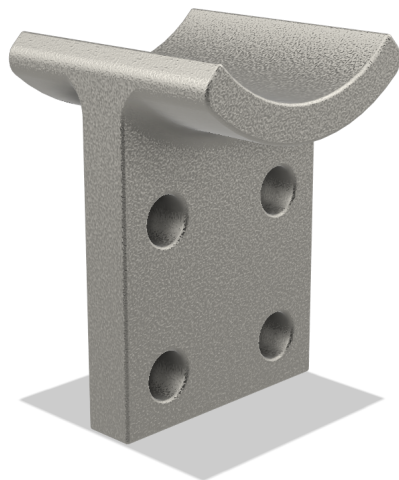

The WBL welding T-connector is designed to facilitate the connection between S.P.S. or Schedule 40 or 80 tubing and flat bar, terminal lugs, or flexible connections. The saddle fits the tubing snugly, permitting accurate alignment and easily performed welding. 550 kV.

S.P.S. TUBING RUN	CATALOG NUMBER	DIMENSIONS IN INCHES				
		A	B	D	E	T
1 1/2	WBL-150	4 1/8	2	5/8	3	1/2
2	WBL-160	4 5/32	2	5/8	3	9/16
2	WBL-161	4 13/32	3	5/8	3	9/16
2 1/2	WBL-169	4 7/32	2	5/8	3	9/16
2 1/2	WBL-170	4 15/32	3	5/8	3	9/16
2 1/2	WBL-171	5 7/16	4	1 1/8	4	9/16
3	WBL-180	4 1/4	3	5/8	3	5/8
3	WBL-181	6 5/8	4	1 1/8	4	5/8
3 1/2	WBL-189	4 7/16	3	5/8	3	11/16
3 1/2	WBL-190	6 3/4	4	1 1/8	4	11/16
4	WBL-191	4 5/32	2	5/8	3	11/16

(continued)

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**



T-Connectors

WBL For S.P.S Sch. 40 or 80

(continued)

S.P.S. TUBING	CATALOG NUMBER	DIMENSIONS IN INCHES				
		A	B	D	E	T
4	WBL-199	4 1/2	3	5/8	3	11/16
4	WBL-200	5 7/8	4	1 1/8	4	11/16
4	WBL-206	8 1/8	4	1 1/4	6	11/16
5	WBL-209	5 9/16	3	5/8	4	3/4
6	WBL-211	7 1/4	2	5/8	3	3/4
6	WBL-219	7 1/4	3	5/8	3	3/4
5	WBL-220	7 3/4	4	1 1/8	4	3/4
6	WBL-230	8 1/4	4	1 1/8	4	3/4

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**

