

Grounding Connectors

FUG Cable to Flat Surface

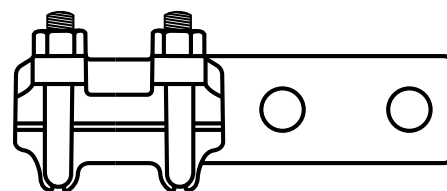
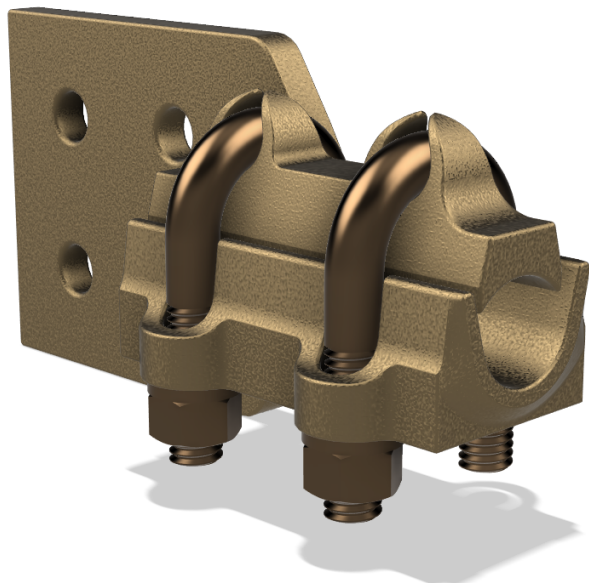


Fig. 1

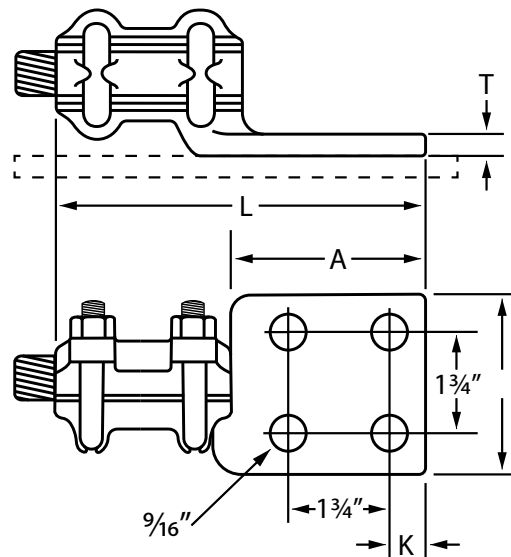


Fig. 2

These connectors are identical in construction to Delta Star standard high compression terminal lugs except the cable end is offset to permit the ends of the U-bolts to clear a flat surface extending beyond the lug pad. This lug can also be used on switch terminals when necessary to obtain greater electrical clearance.

CABLE RANGE*		CATALOG NUMBER	FIGURE NUMBER	DIMENSIONS IN INCHES					U-BOLT DIAMETER
MIN.	MAX.			A	F	K	L	T	
1/0	300	FUG-100	1	3 1/4	1 1/2	5/8	6	1/4	3/8
1/0	300	FUG-101	2	3 1/4	3	5/8	6	1/4	3/8
300	500	FUG-110	1	3 1/4	1 1/2	5/8	6 1/4	3/8	3/8
300	500	FUG-111	2	3 1/4	3	5/8	6 1/4	3/8	3/8
300	500	FUG-112	2	4 1/4	4	1 1/8	7 1/4	1/4	3/8
500	800	FUG-120	1	3 1/4	1 1/2	5/8	7	1/2	1/2
500	800	FUG-121	2	3 1/4	3	5/8	7	7/16	1/2
500	800	FUG-122	2	4 1/4	4	5/8	8	1/2	1/2
750	1000	FUG-130	1	3 1/4	1 1/2	5/8	7 1/4	5/8	1/2
750	1000	FUG-131	2	3 1/4	3	5/8	7 1/4	3/8	1/2
750	1000	FUG-132	2	4 1/4	4	1 1/8	8 1/4	7/16	1/2
1000	1500	FUG-140	2	3 1/4	3	5/8	7 3/4	1/2	1/2
1000	1500	FUG-141	2	4 1/4	4	1 1/8	8 3/4	1/2	1/2
1500	2000	FUG-150	2	3 3/4	3	5/8	8 1/4	1/2	1/2
1500	2000	FUG-151	2	4 1/4	4	1 1/8	8 3/4	1/2	1/2

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**

