

T-Connectors

US-AL Cable Run - Tap


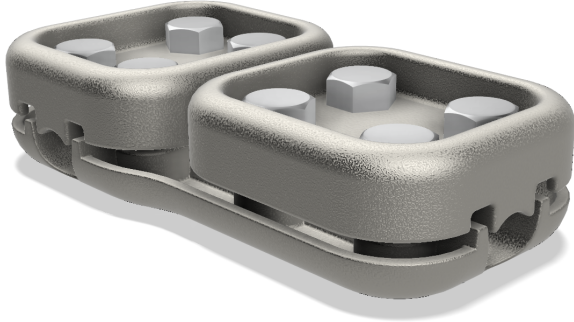


Fig. 1

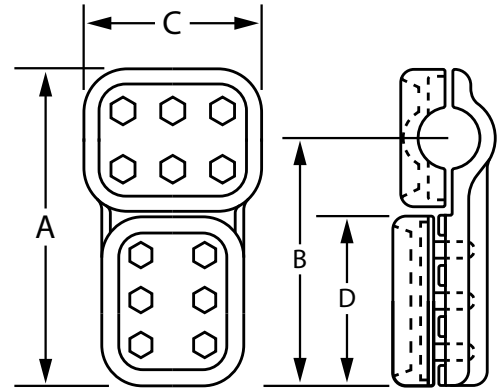


Fig. 2

Type "US" tee connector can be used for a wide range of cable sizes and is designed for easy installation for either substation or transmission line service. For up through 550 kV.

CABLE RANGE RUN		CABLE RANGE TAP		CATALOG NUMBER	FIGURE NUMBER	DIMENSIONS IN INCHES				BOLT DIAMETER IN INCHES	
ALUMINUM	A.C.S.R.	ALUMINUM	A.C.S.R.			A	B	C	D	RUN	TAP
750 to 1000	636 to 900	500 to 800	397.5 to 666.6	US-1152	1	9 1/4	7 1/16	5 3/8	4 3/4	5/8	5/8
750 to 1000	636 to 900	750 to 1000	636 to 900	US-1153	2	9 7/8	7 11/16	5 3/8	5 3/8	5/8	5/8
1000 to 1500	900 to 1272	500 to 800	397.5 to 666.6	US-1162	1	9 1/2	7 3/16	5 3/4	4 3/4	5/8	5/8
1000 to 1500	900 to 1272	750 to 1000	636 to 900	US-1163	2	10 1/8	7 13/16	5 3/4	5 3/8	5/8	5/8
1000 to 1500	900 to 1272	1000 to 1500	900 to 1272	US-1164	2	10 1/2	8 3/16	5 3/4	5 3/4	5/8	5/8
1510.5 to 2000	1351.5 to 1780	500 to 800	397.5 to 666.6	US-1172	1	9 13/16	7 11/32	6	4 3/4	5/8	5/8
1510.5 to 2000	1351.5 to 1780	750 to 1000	636 to 900	US-1173	2	10 7/16	7 31/32	6	5 3/8	5/8	5/8
1510.5 to 2000	1351.5 to 1780	1000 to 1500	900 to 1272	US-1174	2	10 13/16	8 11/32	6	5 3/4	5/8	5/8
1510.5 to 2000	1351.5 to 1780	1510.5 to 2000	1351.5 to 1780	US-1175	2	11 1/16	8 19/32	6	6	5/8	5/8
1510.5 to 2000	1351.5 to 1780	2000 to 2500	2156 to 2493	US-1176	2	11 1/16	8 19/32	6	6	5/8	5/8
2000 to 2500	2156 to 2493	500 to 800	397.5 to 666.6	US-1182	1	10	7 7/16	6	4 3/4	5/8	5/8
2000 to 2500	2156 to 2493	750 to 1000	636 to 900	US-1183	2	10 5/8	8 1/16	6	5 3/8	5/8	5/8
2000 to 2500	2156 to 2493	1000 to 1500	900 to 1272	US-1184	2	11	8 7/16	6	5 3/4	5/8	5/8
2000 to 2500	2156 to 2493	1510.5 to 2000	1351.5 to 1780	US-1185	2	11 1/4	8 11/16	6	6	5/8	5/8
2000 to 2500	2156 to 2493	2000 to 2500	2156 to 2493	US-1186	2	11 1/4	8 11/16	6	6	5/8	5/8
2500 to 3000	2300 to 2515	1000 to 1500	900 to 1272	US-1194	2	11 3/16	8 17/32	7	5 3/4	5/8	5/8
2500 to 3000	2300 to 2515	1510.5 to 2000	1351.5 to 1780	US-1195	2	11 7/16	8 29/32	7	6	5/8	5/8
2500 to 3000	2300 to 2515	2000 to 2500	2156 to 2493	US-1196	2	11 7/16	8 25/32	7	6	5/8	5/8
2500 to 3000	2300 to 2515	2500 to 3000	2300 to 2515	US-1197	2	12 7/16	9 25/32	7	7	5/8	5/8

For cross reference or other
information, please contact us.
deltastarcc.com



**DELTA STAR
CONNECTOR COMPANY**

